



## Product Fiche

Supplier Name or Brand	Arada Ltd
Product Code	CFWDUO-S2
Energy Efficiency Class	Not applicable
Direct Heat Output	5.0 kW
Energy Efficiency Index	Not applicable
The useful energy efficiency at nominal heat output and at minimum load	79 %

Specific precautions that shall be taken when the local space heater is assembled, installed or maintained: *Product should be installed in accordance with local building regulations. Appliance will become very hot during use.*

## Features

Flexifuel	No
Stove body type	Freestanding
Suitable for Smoke Control Areas	No
Suitable for direct air connection	No
Suitable for non-combustible 12mm hearth	Yes
Max hearth Temperature	51.5 °C
Weight gross (packed kg)	60 Kg

## Dimensions


Width	457 mm
Height	495 mm
Depth	334 mm
Flue Diameter	127 mm
Height of stand	200 mm
Height to centre of rear flue	395 mm
Depth from back to centre of top flue	102 mm
Ideal log length	325 mm

## Minimum Distance To Combustibles

To Rear	To Side	Above
800 mm	750 mm	381 mm

## Boiler Tapping Measurements

Add In Boiler Tapping Measurements.  
Rear view example shown. Not to scale.

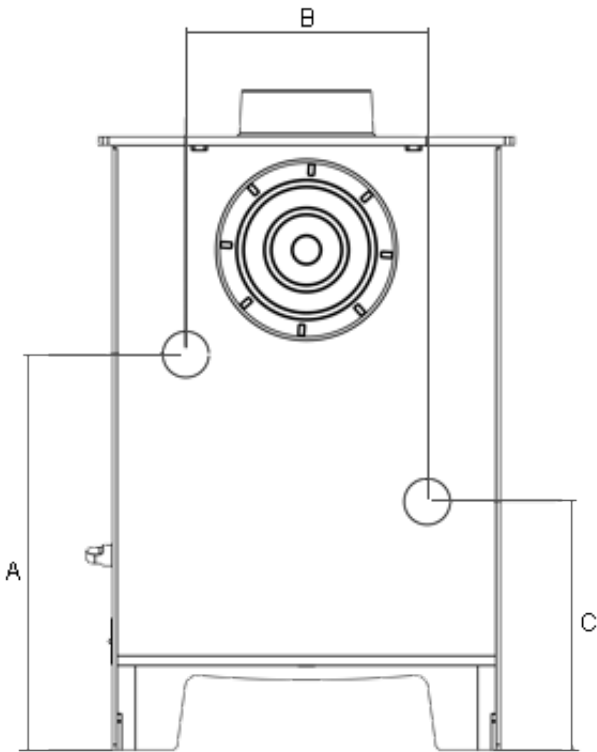

A	B	C
412 mm	252 mm	208 mm

## Optional Extras

Add On Canopy - High - [AOCV013]  
Add On Canopy - Low - [AOCV012]  
Add-in Boiler - [AIBV006]  
Arada Universal Stand - [STAND001]  
Universal Stand/Log Store - [STAND003]